

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
15 January 2004 (15.01.2004)

PCT

(10) International Publication Number  
WO 2004/004441 A1

(51) International Patent Classification<sup>7</sup>: A01C 7/00

(21) International Application Number:  
PCT/SE2003/000925

(22) International Filing Date: 5 June 2003 (05.06.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0202131-9 5 July 2002 (05.07.2002) SE

(71) Applicant (for all designated States except US): VÄDER-  
STAD-VERKEN AB [SE/SE]; P.O. Box 5581, S-590 21  
Väderstad (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): KJELLSSON, Mats  
[SE/SE]; Köinge 6860, S-242 92 Hörby (SE). STARK,  
Crister [SE/SE]; Lejonbacken, S-590 21 Väderstad (SE).

(74) Agents: ALBIHNS STOCKHOLM AB et al.; P.O. Box  
5581, S-114 85 Stockholm (SE).

(81) Designated States (*national*): AE, AG, AL, AM, AT (util-  
ity model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA,  
CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (util-  
ity model), DE, DK (utility model), DK, DM, DZ, EC, EE  
(utility model), EE, ES, FI (utility model), FI, GB, GD, GE,  
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ,  
LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,  
MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU,  
SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN,  
TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: APPARATUS FOR DISCRETE DISTRIBUTION OF GRANULES

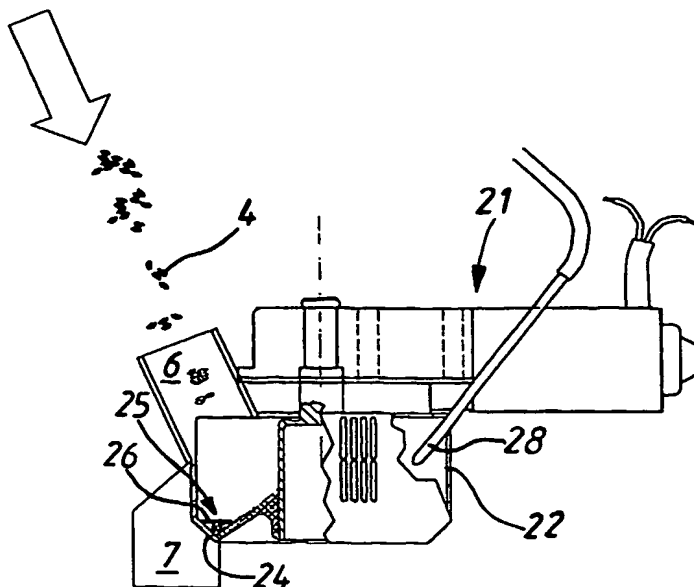

(57) Abstract: An apparatus for discrete distribu-  
tion of granules, such as seed, fertiliser or the like  
comprises a path forming device having an inlet (6)  
adapted to be associated with a granules container of  
an agricultural machine, and an outlet (7) adapted to  
be associated with a coultter of the agricultural ma-  
chine. In accordance with the invention, said path  
(25) is defined by at least one wall extending on ei-  
ther sides of and along at least a part of the extension  
of said path, wherein said path is formed about a sub-  
stantially vertical axis. The invention also relates to  
an agricultural machine (10) provided with such an  
apparatus.

BEST AVAILABLE COPY

WO 2004/004441 A1

Apparatus for discrete distribution of granules

TECHNICAL BACKGROUND

- 5 The present invention relates to an apparatus for discrete distribution of granules, such as seed, fertiliser or the like comprising a path forming device having an inlet adapted to be associated with a granules container of an agricultural machine, and an outlet adapted to be associated with a coulter of the agricultural machine.
- 10 The invention also relates to an agricultural machine comprising a granules container for granules, such as seed, fertiliser or the like, a coulter for placing granules at a predetermined depth in the soil, comprising such an apparatus for distribution of granules, said apparatus for distribution of granules being associated with the container and with the coulter.
- 15 Such a device for distributing granules and such an agricultural machine is known from SU-A-106 473, EP-A-0 350 634, EP-A-0 583 571 and DE-C-196 36 787, respectively. The devices described in these documents suffer from the disadvantage that the respective granules are not distributed evenly in the soil.
- 20 For as long man has been producing sowing machinery, there has always been a need to improve the distribution of the seeds in the seed rows. Known mechanical and pneumatic systems give an uneven distribution of the granules in a furrow in the soil worked by a seed coulter or a fertiliser coulter. The
- 25 granules tend to collect near to each other or to be set too far apart from each other. Maize and soya among other crops are sensitive to uneven distribution, for which reason precision sowing machines, which are expensive and slow, are used for such crops.

## SUMMARY OF THE INVENTION

One object of the present invention is to obtain substantially the same growth conditions in the form of light, water and nutrition for the plants. This has been achieved with an agricultural machine and an apparatus of the type mentioned  
5 at the outset, wherein said path is defined by at least one wall extending on either sides of and along at least a part of the extension of said path, wherein said path is formed about a substantially vertical axis. Hereby, an even distribution of the granules is achieved.

## 10 DRAWING SUMMARY

The invention will be described in more detail below with reference to the attached drawings, in which:

- Figure 1 shows an apparatus according to the invention arranged at a coulter,  
15 Figure 2 illustrates an agricultural machine with pneumatic delivery provided with the apparatus according to figure 1,  
Figure 3 illustrates an agricultural machine with mechanical delivery provided with the apparatus shown in figure 1,  
Figure 4 is a partial enlargement of the agricultural machine shown in Fig. 2,  
20 Figures 5a – 5d is a side view of a first embodiment of the device,  
Figures 6a – 6d illustrate a second embodiment of the invention,  
Figures 7 illustrates a third embodiment of the invention,  
Figures 8a – 8e illustrate a fourth embodiment of the invention,  
Figures 9a – 9d illustrate a fifth embodiment of the invention,  
25 Figures 10a – 10f illustrate sixth to eleventh embodiments of the invention,  
Figures 11a – 11c illustrate twelfth to fourteenth embodiments of the invention,  
Figure 12 illustrates fifteenth to nineteenth embodiments of the invention,  
Figure 13 illustrates a twentieth embodiment of the invention,  
30 Figure 14 illustrates a twenty-first embodiment of the invention,

Figure 15a – 15b illustrates a twenty-second embodiment of the invention,  
Figure 16 illustrates a twenty-third embodiment of the invention,  
Figure 17a – 17b illustrates a twenty-fourth embodiment of the invention,  
Figure 18 illustrates a twenty-fifth embodiment of the invention,  
5 Figure 19 illustrates a twenty-sixth embodiment of the invention,  
Figure 20 illustrates a twenty-seventh embodiment of the invention,  
Figure 21 illustrates a twenty-eighth embodiment of the invention, and  
Figure 22 illustrates a twenty-ninth embodiment of the invention.  
Figure 23 illustrates a thirtieth embodiment of the invention.

10

#### DETAILED DESCRIPTION

Figure 1 shows an apparatus 2 for discrete distribution of granules 4, such as seed, fertiliser or the like device, having an inlet 6 and an outlet 7 for the granules 4. The outlet 7 is connected to a coulter 8 of an agricultural machine  
15 10 (see figure 2) pulled by a tractor 11. The seeds are blown by means of a not shown pneumatic source to the apparatus 2 through tubings 12 from a container 13.

It should be noted that the apparatus 2 has been shown schematically in figure  
20 1. It should thus be understood that the apparatus 2 may be anyone of the below described embodiments. It should also be understood that the apparatus 2 may be an integrated part of the coulter 8.

Common for all embodiments is that the apparatus 1 is adapted to be driven by  
25 a power source, for causing at least a part of the apparatus to rotate and/or to vibrate. In the first case, the speed of rotation may be proportional to the supply of material through the inlet. It may also be proportional to the drive speed of the agricultural machine 10.

In figure 3 the granules fall down into the apparatus 2 by means of a roller arranged in the container 13. A radar 15 directed obliquely downwards for detecting the speed of the agricultural machine relative to the ground. The radar can of course be arranged on the tractor 11 instead. In the cab of the tractor 11 there is provided a control panel 16 for controlling the distribution of the granules in the soil, i.e. the distance between the granules. A computer associated with the control panel controls the apparatus 2, so that the distance between the granules is substantially the same, irrespective of the speed of the equipment. Alternatively, or in addition to this, the speed of the agricultural machine can be detected by a wheel 17.

Figure 4 shows the apparatus 2 according to a first embodiment arranged on a coulter.

In figures 5a – 5c the apparatus 2 illustrated in figure 4 is shown in further detail. A frusto-conical distributing member 20 is rotatably arranged in a housing 22, defining together with the distributing member 20 a space 23. A power source 21 in the form of an electric motor is provided. Of course, the power source may instead be pneumatic, hydraulic, electromagnetic or be a mechanic transmission.

Alternatively, the power source may cause the housing and/or the distributing member to vibrate. In that case, the frusto-conical member may be rotatable. However it may alternatively be static relative to the housing 22.

The frusto-conical distributing member 20 is arranged with only a small gap in relation to an angled portion 24 of the housing 22. The angled portion 24 and the periphery of the frusto-conical distributing member 20 form together a path 25 for separation of granules.

In order to promote the separation of granules, the distributing member 20 may be provided with a friction enhancing coating, whereas, the inside surface of the angled portion 24 may be provided with a friction enhancing coating close to the inlet 6 but with a friction lowering coating close to the outlet 7.

- 5 Alternatively or in addition, obstacles are arranged on the inside of the housing 22 e.g. diametrically opposite to the outlet 7.

- 10 In order to keep the granules 4 in the path 25, it may be at least partly covered with a net 26 or the like. The outlet 7 from the space 23 is designed to be coupled to the coulter 8.

- 15 During operation, granules are fed through the inlet 6 to the space 23. The granules 4 are separated due to the friction between the distributing member and the angled portion 24.

As can be seen in figure 5d, fins 27 may be arranged on the distributing member 20 for quicker transportation in the circumferential direction.

- 20 The device described above is advantageously used near the ground surface (see Figures 1 - 3).

- 25 As stated above, the rotation of the distributing member 20 can be made proportional to the speed of travel. With an electrical drive, the delivery can also be stopped and started instantaneously upon lifting/lowering of the agricultural machine in order to obtain a clearly marked start of the delivery and in order to prevent loss of dressed seeds on the ground surface where birds and animals can eat them. Alternatively, a press button on the control panel 16 can be used for starting and stopping.

It has in recent times become common practice to dress the seeds during the sowing or to supply the seeds with a fluid or a powder with bacterial culture of fertiliser. It is desirable to add the fluid or powder as close to the surface of the ground as possible, since the fluid or powder is often corrosive. In this way it is possible to avoid contamination of the agricultural machine. A nozzle 28 for delivering a surface-treating agent for the material, so-called seed dressing, is for this purpose arranged in the space 23.

With the proposed device, an agent can easily be added without impairing the function of the machine or of the device. The agent is preferably added via a nozzle, which sprays the agent down towards the plate.

The device can of course be provided with more than one inlet. Likewise, it can be provided with more than one outlet.

It should be noted that the housing may be rotated instead of the distributing member. Likewise, the housing and the distributing member may be rotated in opposite directions or in the same direction however with different speeds.

Figures 6a to 6c illustrate a second embodiment of the apparatus 2. The housing 22 is frusto-conically shaped, the inlet 6 enters the housing 22 at a portion of the housing having a relatively small diameter, whereas the outlet 7 is arranged at a portion having a relatively large diameter. Inside the housing, an upper conically shaped distributing member 20a and a lower conically shaped distributing member are arranged.

As shown in figure 6b, the upper and the lower distributing members 20a, 20b have a common axis 30 and are commonly driven by the motor 21. The upper distributing member 20a has a smaller base diameter than the lower distributing member 20b. The angled portions 24a and 24b respectively, are

arranged close to the base of the conically shaped distributing members 20a and 20b, respectively, and define paths 25a, 25b, respectively. Thus, the peripheral velocity of the distributing member 20a relative to the angled portion 24a will be lower than the peripheral velocity of the distributing member 20b relative to the angled portion 24b. Thus, a granule in the path 25b will have a higher speed than in the path 25a. Thus, separation of the granules is achieved not only by the friction of the walls defining the paths, but also due to increasing speeds.

10 In figure 6c is shown that equally large cones without bottoms may be arranged on top of one another. The angled portion 24a of the housing, is however not directed towards the base of the cone 20a, but towards a portion closer to the top of the cone, and thus forming the path 25a. Also in this case, granules in the path 25a will have a lower speed in the path 25a than in the path 25b.

In figure 6d is shown a vibration promoting device 21 causing the a housing to vibrate. Vibration will cause the granules to travel along the path 25a to the path 25b and through the outlet, while being separated.

20

Figure 7 shows a housing 22 having circular cylindrical portions adapted to the size of different cones 20. The angled portion 24 may thus be substantially parallel to the axis 30. Openings 31 are provided for allowing granules to fall from an upper cone to a lower cone. The openings are arranged at an angle to one another in order to allow the granules to travel in each path over nearly the whole length of the path 25.

25

In figure 8a, the first and second distributing member 20a, 20b substantially in the form of cones, are arranged adjacent to one another. The second cone 20b



is arranged lower than the first cone 20a. An electric motor 21 drives the second cone. A gear 32 causes the cone 20a to rotate slower than the cone 20b.

5 In figure 8b, the cone 20a has a separate motor with lower rotational speed V1 than the motor 21 of the cone 20b. Alternatively, the cones 20a and 20b are driven with the same speed, but the cone 20b is larger than the cone 20a.

10 Figure 8c illustrates direction of rotation of the cones shown in figures 8a and 8b, respectively.

Figures 8d – 8e shows cones of the same size arranged adjacent to one another at substantially the same level. The cones are driven in opposite directions, preferably with different speeds, i.e. the speed of the cone 20b is higher than that of the cone 20a to promote separation of the granules. Of course, the speed  
15 of the motors may be the same if cones of different diameters are used.

In figures 8a – 8d, the direction of rotation may be the same. In that case, the outlet 7 should be moved.

20 In figure 9a, the housing 22 is elongated and circular cylindrical. Inside the housing, first to four distributing members 20a – 20d are arranged along the common axis 30. The path 25 is defined by the inside wall of the circular cylindrical housing 22 and the cone, i.e. no angled portion is provided. A pneumatic source drives a propeller connected to an axle 36 coaxial with said  
25 axis 30. Radially extending grooves in the housing allow the granules to fall from one cone to the other. As in the embodiment of figures 7a, 7b, the grooves 31 are disposed about the circumference of the housing that the granules are allowed to travel over a major part of the path 25.

In figure 9b, the openings 31 in the cones allow the granules to fall from one cone to the other. A guiding element is adapted to guide the granules away from the outlet 7 and to keep the granules separated by defining the start of the lowest path.

5

It should be noted that in order to even more promote separation of the granules, the axle 36 and/or the cones may be provided with a gear mechanism, in order to achieve an increasing speed of the cones in the flow direction.

10

In figure 9c, the housing 22 is frusto-conical, the top of which being open and forming an inlet 6. The path 24 is thus formed by the conical housing and the cones.

15 In figure 9d, the housing 22 is cylindrical and the distributing members 20a-20c are provided with a helical upper surface. Of course, this embodiment may be adapted to a housing having a conical shape, as is shown in figure 9c.

20 Figures 10a – 10f illustrate possible forms of the housing 22 and the distributing member 20. The opening 31 has been omitted for reasons of clarity. Of course, the distributing members 20 and the housings shown are interchangeable. Of course, the shown housings and distributing members are also applicable in the embodiments shown in figures 5a – 9c.

25 In figure 11a, the member 40 is a flexible ring of e.g. rubber to be arranged on the bottom edge of a cone. Depending on the size of the flexible ring, it may constitute the whole distributing member 20.

30 In figure 11b, a standard V-ring arranged on a circular cylindrical axle. The V-ring thus constitutes the distributing member 20.

In figure 11c, bristles are arranged radially at the bottom of the cone to fill out the gap between the cone and the housing.

5 In figure 12, the housing has a plurality of spherically formed portions. Inside the housing, distributing members of different shapes are shown. Of course, each portion may be a single housing having one of the distributing members shown in the figure, or in any of the figures 5a – 9c. Also in this case, a gear mechanism may be provided (cf. figures 9a – 9b).

10

In figure 13 the housing 22 as well as an axle 42 is circular cylindrical and has different levels of angled portions 24a – 24 d. The angled portions 24a – 24d are also arranged at increasing distances from one another to promote separation of the granules. As above, the openings 31 are arranged at different circumferential positions. The axle 42 may however have an increasing diameter from the top in order to increase the speed of the granules in the flow direction.

15

In figure 14, angled portions 24a – 24c point radially towards the circular cylindrical axle 42. The angled portions have an increasing angle relative to the axle 42, i.e. the path is narrower the farther down in the housing. In the bottom of the axle 42, a further distributing member 20 is arranged in the form of a cone. Of course, the cone could be replaced by a further angled portion. The openings 31 have been omitted for reasons of clarity.

25

In fig 15a, the a helical angled portion 24 has been arranged on the inside of the housing. The helical angled portion points towards the rotatable axle 42. The helical angled portion 24 has a increasing pitch in order to promote separation of the granules, since their speed will increase due to the increasing pitch. The helical portion may however have an increasing pitch in

30

combination with a housing and/or an axle 42 of an increasing diameter in the flow direction.

5 In fig 15b, the motor drives a belt, which in turn drives the housing 22, while the axle is fixed. It would alternatively be possible to turn only the angled portion 24, while keeping either of the housing and the axle or both of them still

10 It should be noted that in all the above described embodiments, it is possible to turn the housing instead of the axle or distributing member

In figure 16, a first portion 22a of the housing is rotatable, whereas a second portion 22b is fixed. A first distributing member 20a is a conical top of the lower portion 22b, and is thus fixed. A second distributing member 20b is  
15 connected to the first portion 22a, and is consequently rotatable.

In figure 17a, the distributing member 20 is a rotatable helical member of increasing pitch and the housing 22 is circular cylindrical. Owing to the increasing pitch and/or rotation speed, the separation of the granules is  
20 promoted.

In figure 17b, the housing is rotatable and the helical member 22 is fixed.

25 It should be noted that the helical angled portion shown in figures 15a, 15b and 17a - 20 may be angled increasingly (cf. figure 14). This may be performed step-wise or continuously.

In figure 18 the distributing member 20 is a rotatable helical member and the housing 22 is circular cylindrical. A gap is provided between the guide

member 38, which is adapted to guide the granules away from the outlet 7 and to keep the granules separated by defining the start of the lowest path.

5 In figure 19, the distributing member 20 is a helical member of decreasing pitch and fixedly connected to the circular cylindrical housing 22. The vibrating device 21 causes the housing and the distributing member to vibrate, and thus to cause the granules to be transported along and to be separated in the path 25.

10 In figure 20, the distributing member is helical and the housing is partly tubular and partly conical, however truncated, i.e. the with decreasing cross-section. In order to promote separation of granules in the conical portion, the pitch of the helices is increasing more than what is the case e.g. in the embodiment of figure 17, i.e. due to increasing area of the path 25..

15 It should be noted that the embodiments shown in figures 15a – 20 may also be passive, i.e. only be influenced by gravity.

20 In figure 21, a helical tube 50 having a circular cross-section at the inlet 6 and a partly V-shaped cross-section at the outlet 7 is turned, vibrated or solely influenced by gravity. The number of turns of the helice may be a part of a turn, one turn or many more than just two. The V-shaped cross-section promotes separation of the granules.

25 In figure 22, a conical helical tube is shown, i.e. with increasing diameter in the flow direction. The farther down a granules travel in the path 25, the higher the speed; separation of the granules is thus promoted. In this embodiment, the tube 50 is shown as having a constant circular cross-section.

In figure 23, the conical helical tube of figure 22 has been provided with a V-shape cross-section for promoting separation of the granules.

5 The cross-section of the conical helical tube of figures 22 or 23 may in addition or alternatively be provided with an increasing cross-section in order to prevent clogging of the tube by granules.

10 The distributing members shown above as cones may, in order to improve separation of the granules, be selected such that the top angle is smaller the farther down in the housing they are situated.

It should be noted that the provision of friction enhancing and/or friction lowering coatings and/or obstacles, as discussed in connection with figures 5a – 5c, is applicable to all the above described embodiments.

15

It should also be noted that the provision of a net 26 for keeping the granules in the path 25, is applicable to the embodiments of figures 5a – 14 and 16.

## CLAIMS

1. An apparatus for discrete distribution of granules, such as seed, fertiliser or  
5 the like comprising a path forming device having an inlet (6) adapted to be  
associated with a granules container of an agricultural machine, and an outlet  
(7) adapted to be associated with a coulter of the agricultural machine,  
**characterised in that** said path (25) is defined by at least one wall extending  
on either sides of and along at least a part of the extension of said path,  
10 wherein said path is formed about a substantially vertical axis.
2. An apparatus according to claim 1, wherein said path forming device  
comprises at least one housing having a circular cross-section, and at least one  
distributing member having at least partly an annular periphery about said  
15 central axis, wherein said distributing member during use has at least partly a  
downward sloping surface from said central axis towards an inside wall of the  
housing, and/or said inside wall has at least partly a downward sloping surface  
towards said distributing member, wherein said inside wall and said  
distributing member form said path.  
20
3. An apparatus according to claim 2, wherein either of said housing and said  
distributing member are rotatably arranged in relation to one another.
4. An apparatus according to claim 2, wherein both of said housing and said  
25 distributing member are rotatably arranged in relation to one another.
5. An apparatus according to claim 4, wherein said housing and said  
distributing member are rotatably arranged in opposite directions.

6. An apparatus according to claim 4, wherein said housing and said distributing member are arranged to be rotatable in the same direction, however with different speeds.
- 5    7. An apparatus according to claim 2, wherein either of said housing and said distributing member are arranged in a fixed relationship, and are adapted to be associated with a vibration device.
8. An apparatus according to claim 1 - 7, wherein a guide member is arranged  
10    to retain the granules in the path, at least in proximity to the outlet.
9. An apparatus according to claim 8, wherein the guide member covers substantially the whole path.
- 15    10. An apparatus according to anyone of claims 2 - 9, wherein at least the surface of either of or both of the distributing member and the housing is made of a flexible material.
11. An apparatus according to anyone of claims 2 - 10, wherein at least one  
20    further distributing member is provided downstream the distributing member and in the same housing.
12. An apparatus according to anyone of the claims 2 - 11, wherein at least one  
25    further distributing member is provided downstream the distributing member and in a separate housing.
13. An apparatus according to claim 11 or 12, wherein said further distributing member is arranged such that during use, the path of said distributing member and said further distributing member are at least partly in the same horizontal  
30    plane.



14. An apparatus according to claim 11 or 12, wherein said further distributing member is arranged such that the path thereof is in a plane lower than that of said distributing member.

5

15. An apparatus according to anyone of claims 11 - 14, wherein the distributing member and the further distributing member are associated with a power source in such a way that they have substantially the same speed.

10 16. An apparatus according to anyone of claims 11 - 14, wherein the distributing member and the further distributing member are associated with a power source in such a way that the further distributing member has a higher speed than the distributing member.

15 17. An apparatus according to anyone of claims 2 - 7, wherein said distributing member is helically shaped with constant pitch.

18. An apparatus according to anyone of claims 2 - 7, wherein said distributing member is helically shaped with a pitch increasing in the direction of flow.

20

19. An apparatus according to anyone of claims 2 - 18, wherein said housing is at least partly tubular.

20. An apparatus according to anyone of claims 2 - 19, wherein said housing is  
25 at least partly conical in the direction of flow.

21. An apparatus according to anyone of claims 2 - 20, wherein said housing is at least partly spherical.

22. An apparatus according to anyone of claims 1 – 7, wherein said path is formed by a helical tube.

23. An apparatus according to claim 22, wherein the helical tube forms at least  
5 a part of a cone.

24. An apparatus according to claim 22 or 23, wherein at least a portion of said helical tube has substantially a V-shaped cross-section, forming said path.

10 25. An apparatus according to anyone of the preceding claims, wherein at least a part of said wall has a friction enhancing surface.

26. An apparatus according to anyone of the preceding claims, wherein at least a part of said wall has a friction reducing surface.

15

27. An apparatus for discrete distribution of granules, such as seed, fertiliser or the like, comprising a housing, at least one inlet member of said housing adapted to be associated with a granules container for of an agricultural machine, at least one outlet member of said housing adapted to be associated  
20 with a coulter of the agricultural machine, and a distributing member having an annular periphery and a central axis, wherein said distributing member during use has at partly a downward sloping surface from said central axis towards an inside wall of the housing, **characterised in that** at least one further distributing member is arranged downstream the first distributing  
25 member.

28. An apparatus according to claim 27, wherein both of said first distributing member are rotatably arranged, wherein said second distributing member has a higher peripheral velocity that that of the first distributing member.

30

29. An apparatus according to claim 27 or 28, wherein said first distributing member has a first peripheral circular cross-section and, wherein said second distributing member has a second peripheral circular cross-section, said second cross-section having a larger diameter than that of said first cross-section.

5

30. An apparatus according to claim 27 or 28, wherein said first distributing member has a first peripheral circular cross-section and, wherein said second distributing member has a second peripheral circular cross-section, said second cross-section being substantially the same.


10

31. Agricultural machine comprising a container for granules, such as seed, fertiliser or the like, a coulter for placing granules at a predetermined depth in the soil, **characterised in that** it comprises an apparatus according to any of the preceding claims, said apparatus being associated with the container and

15

with the coulter.

1/33

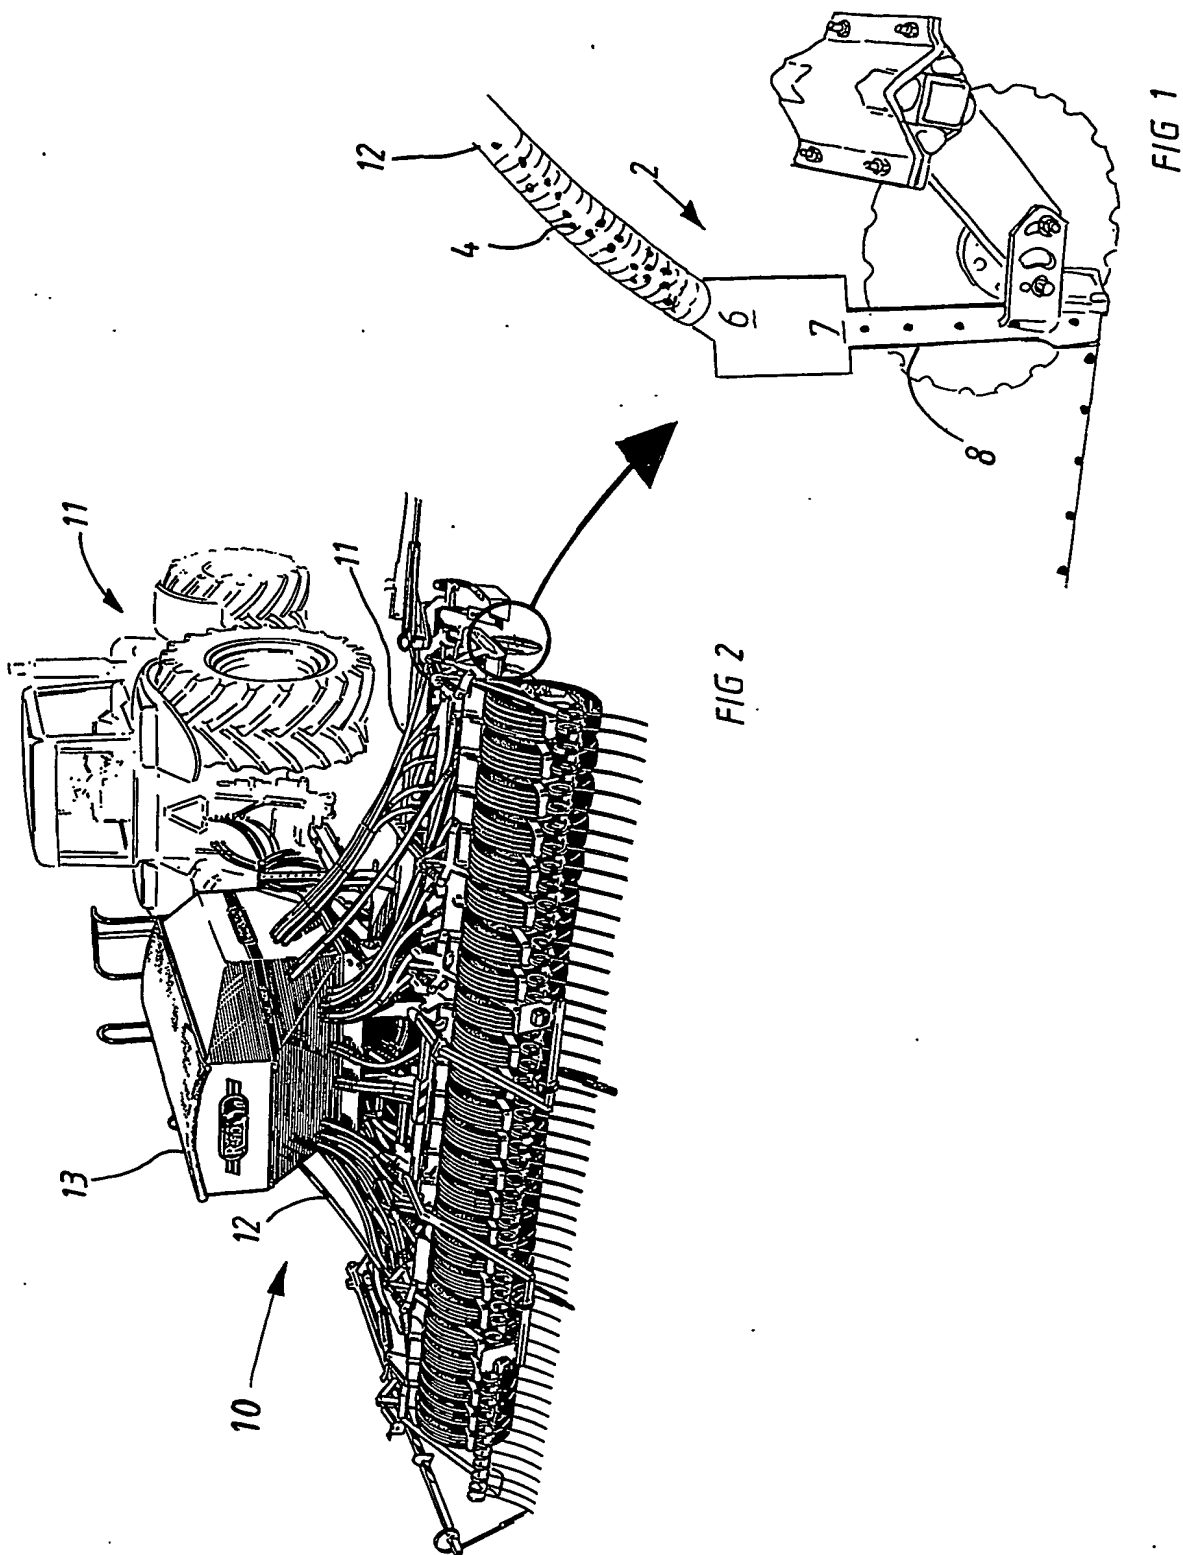

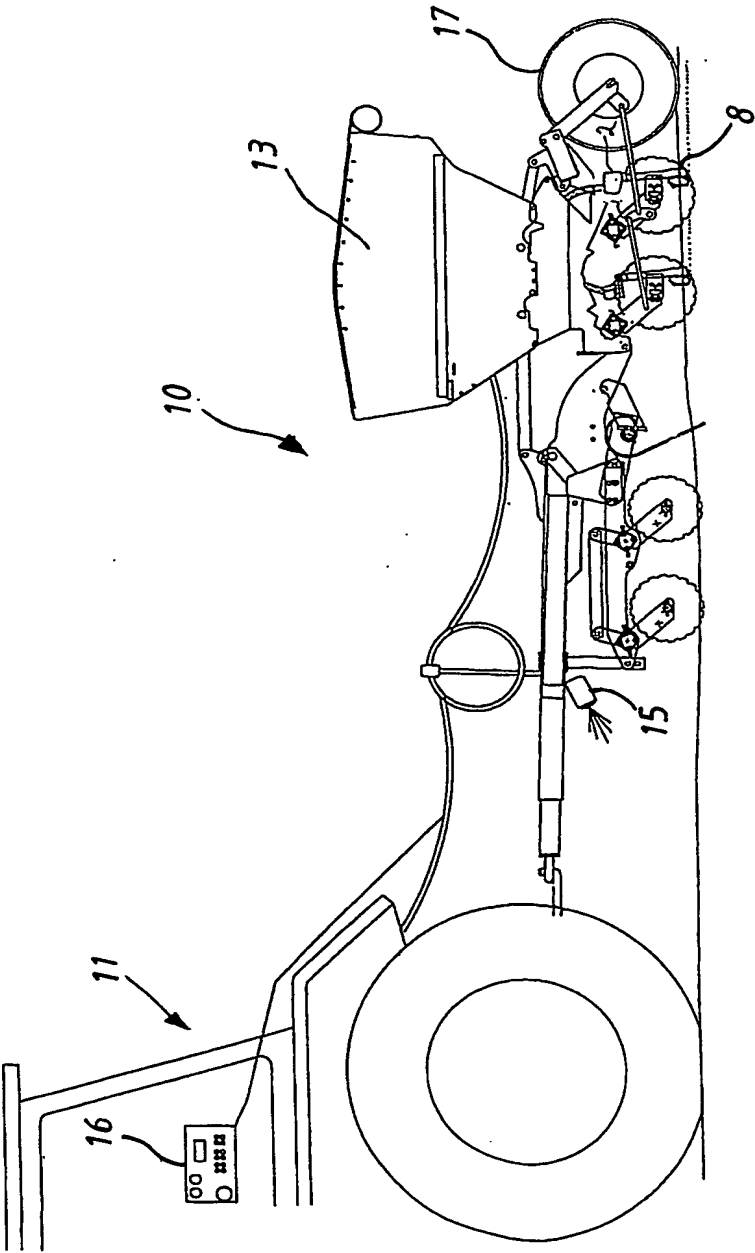


FIG 3

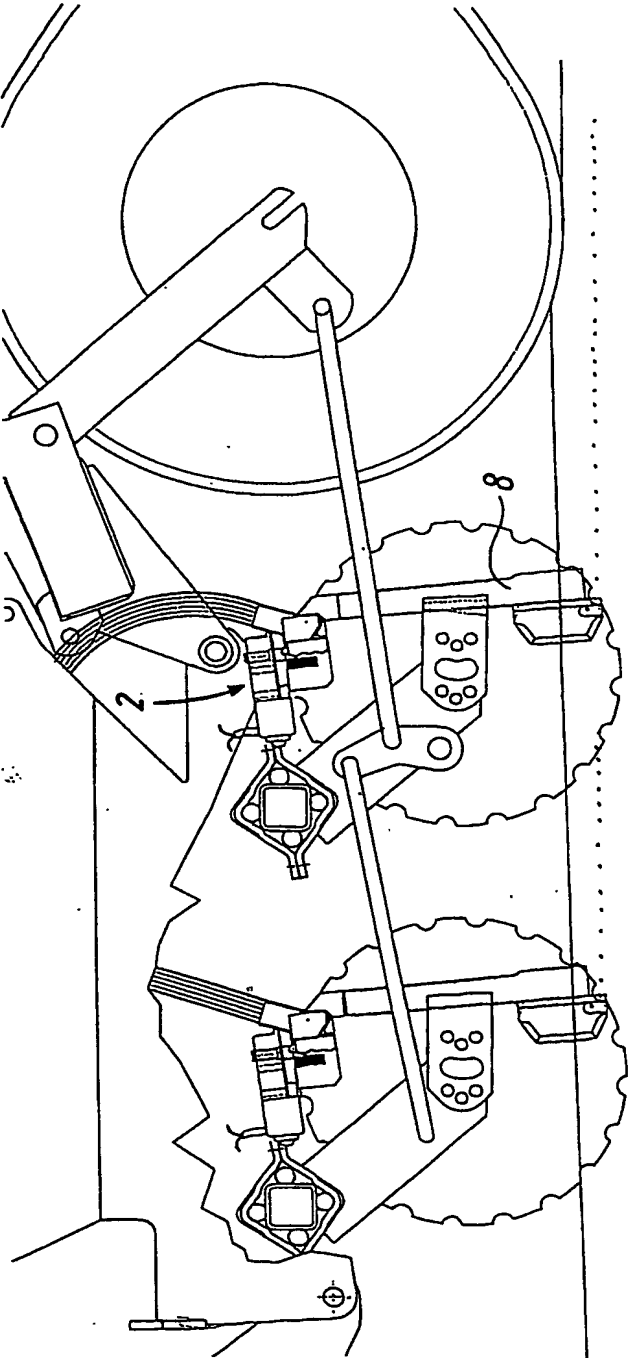
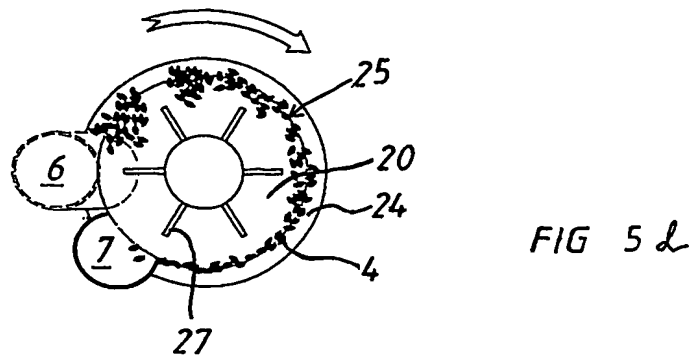
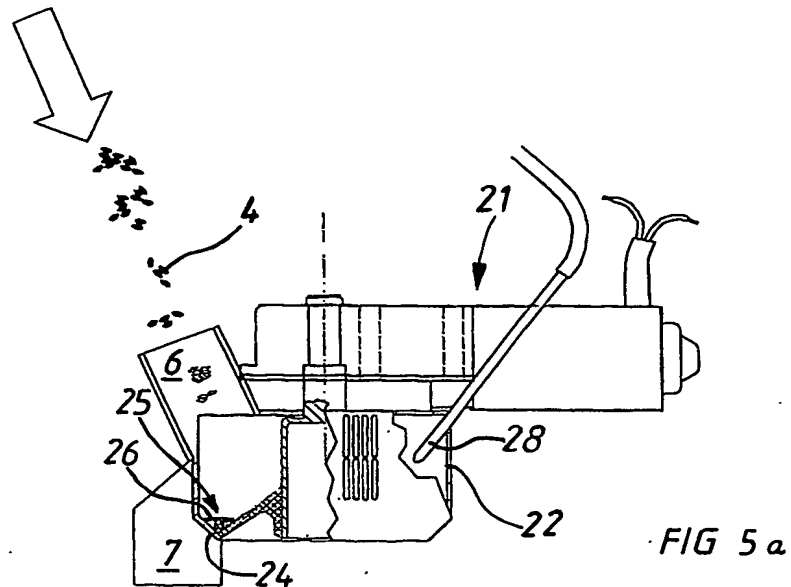


FIG 4



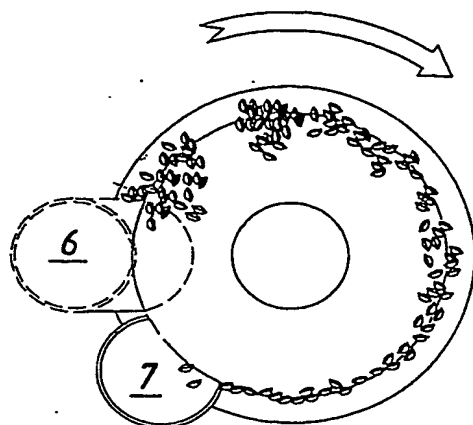


FIG 5 b

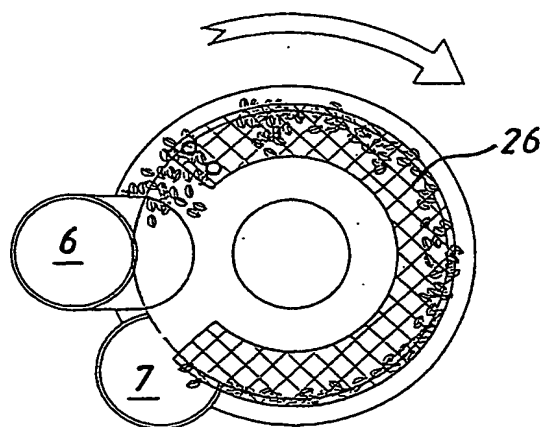


FIG 5 c



6/33



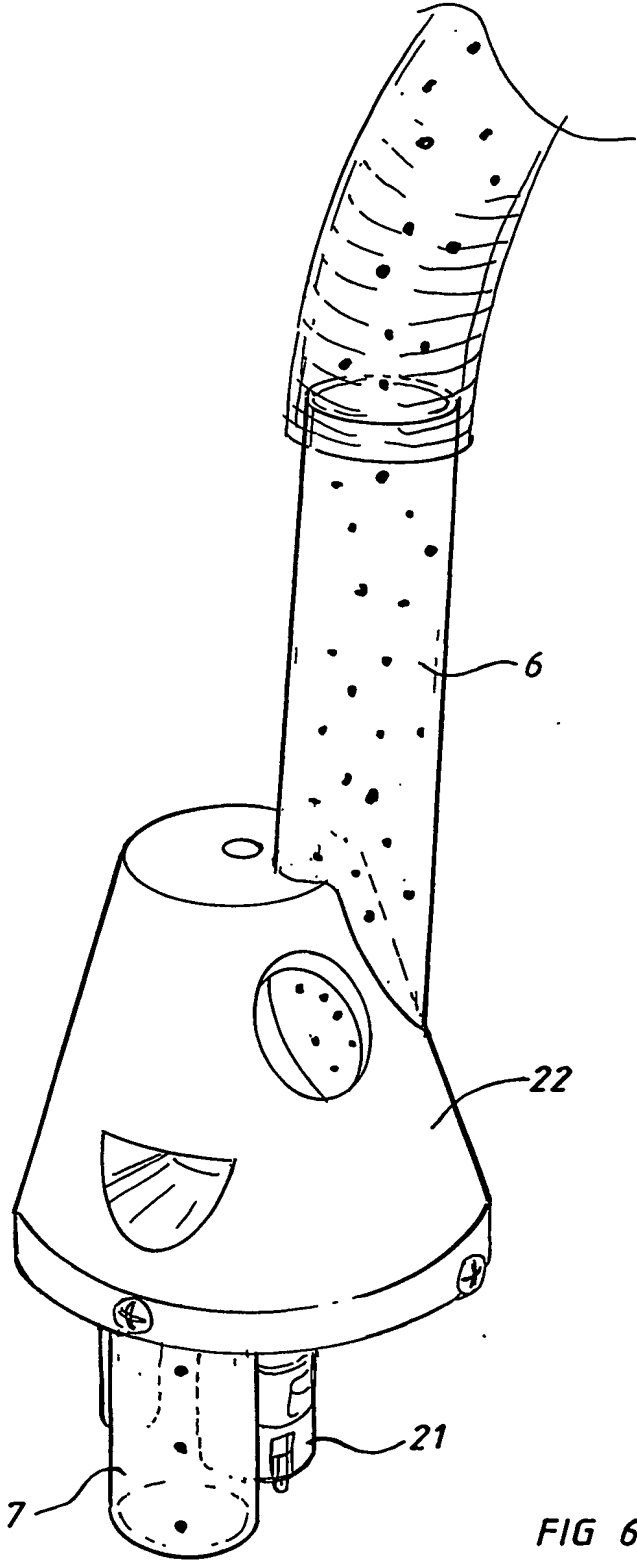



FIG 6 a

7/33

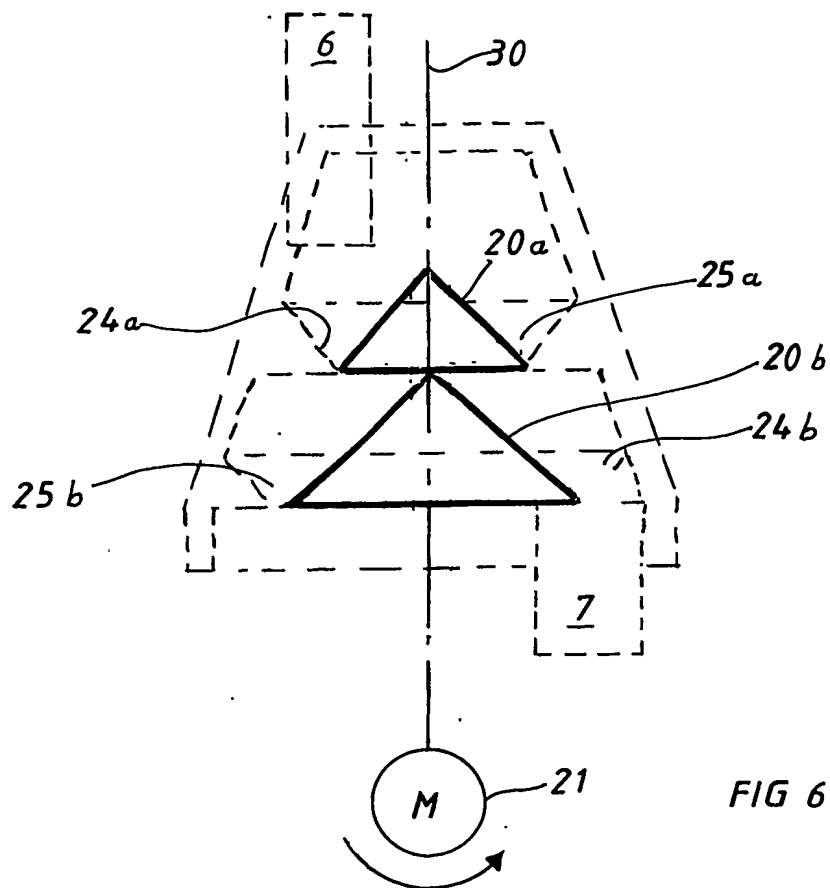

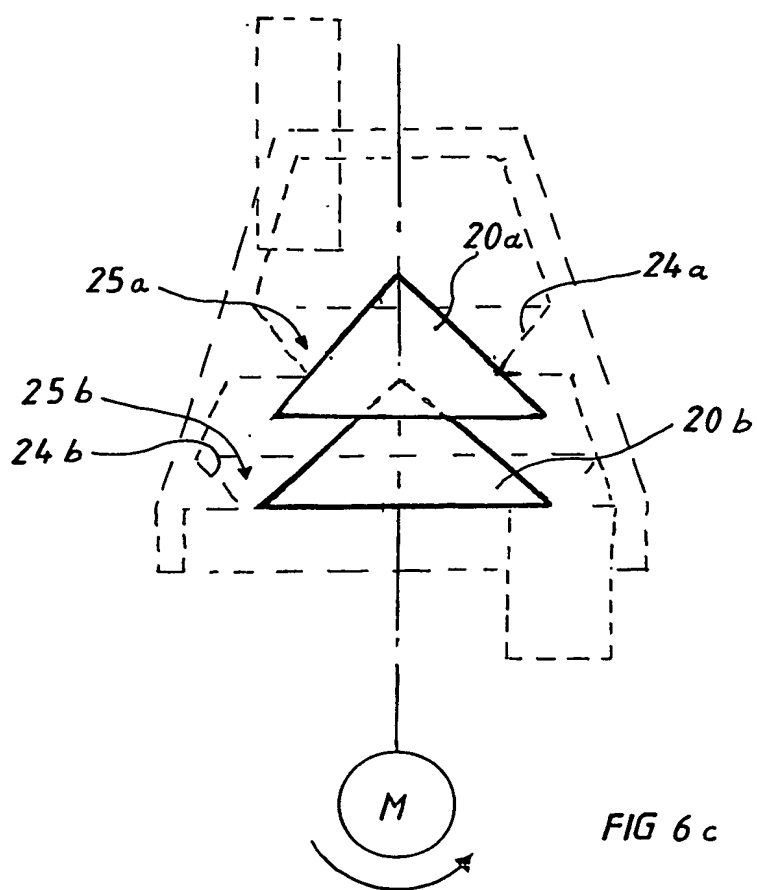

9/33

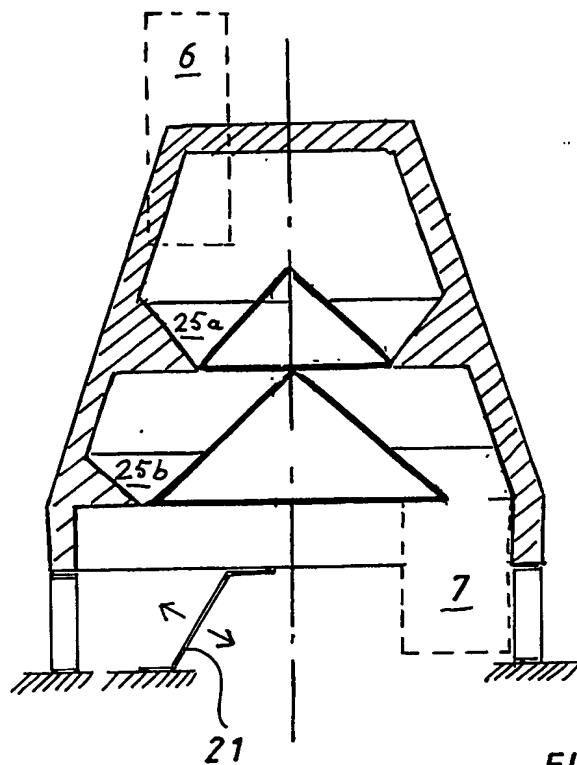

10/33

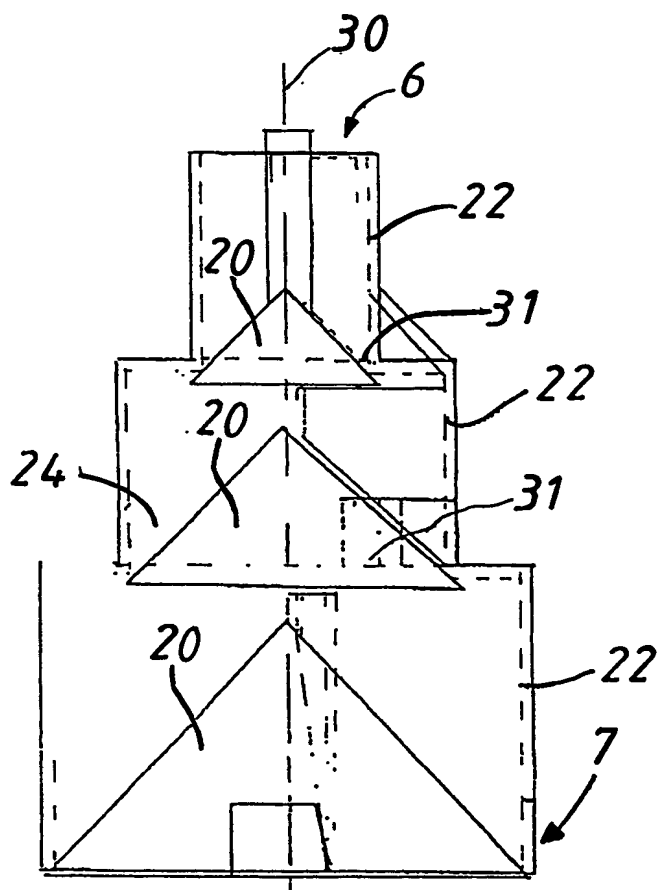
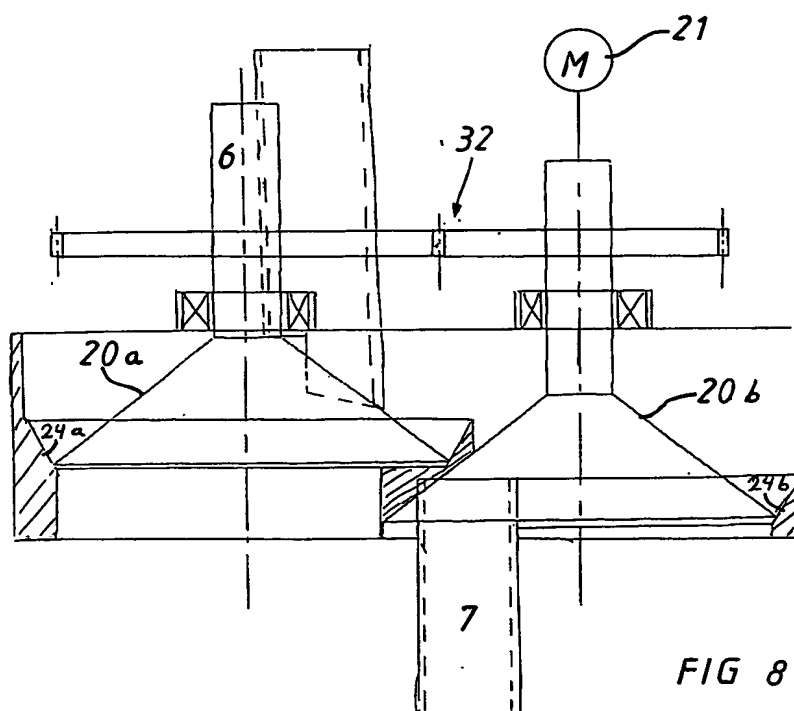
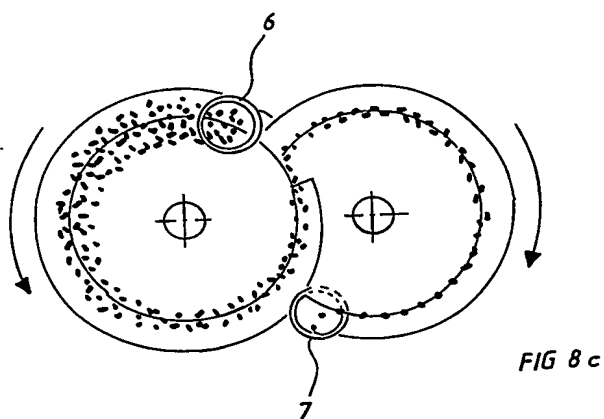
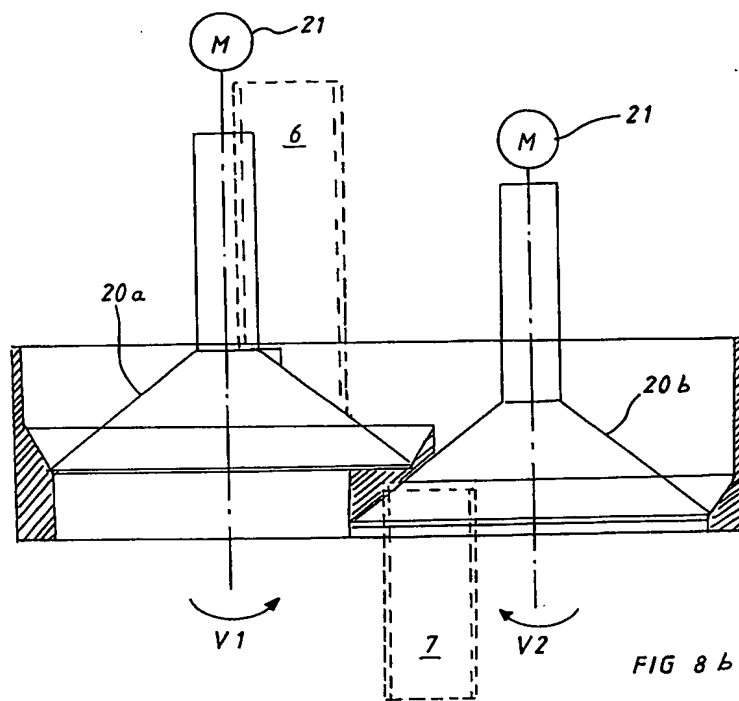
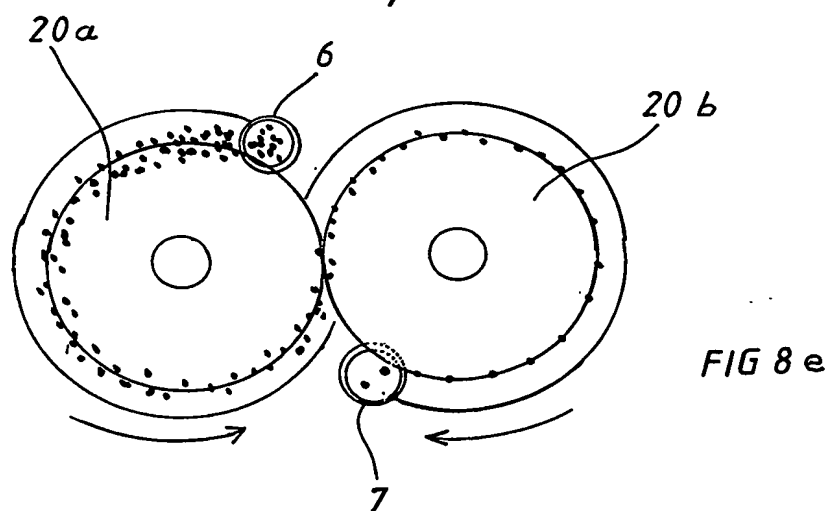
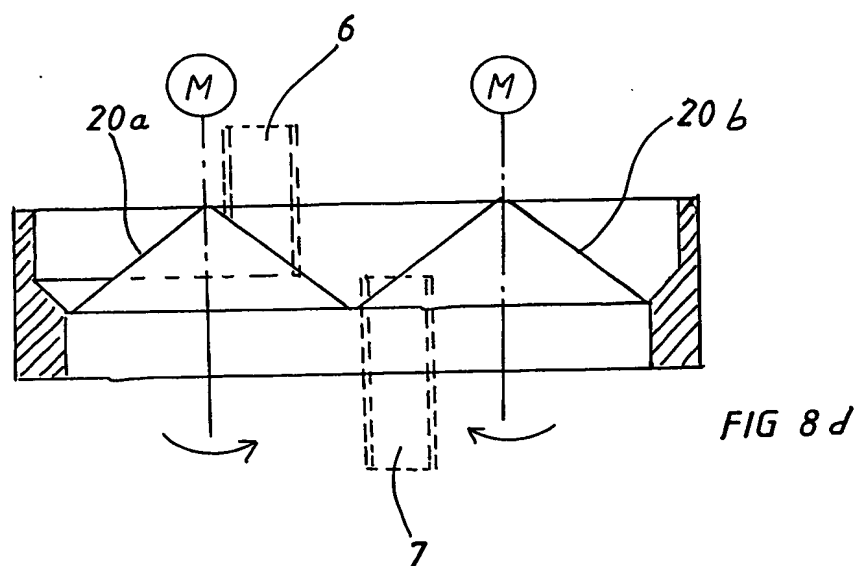


FIG 7.

11/33









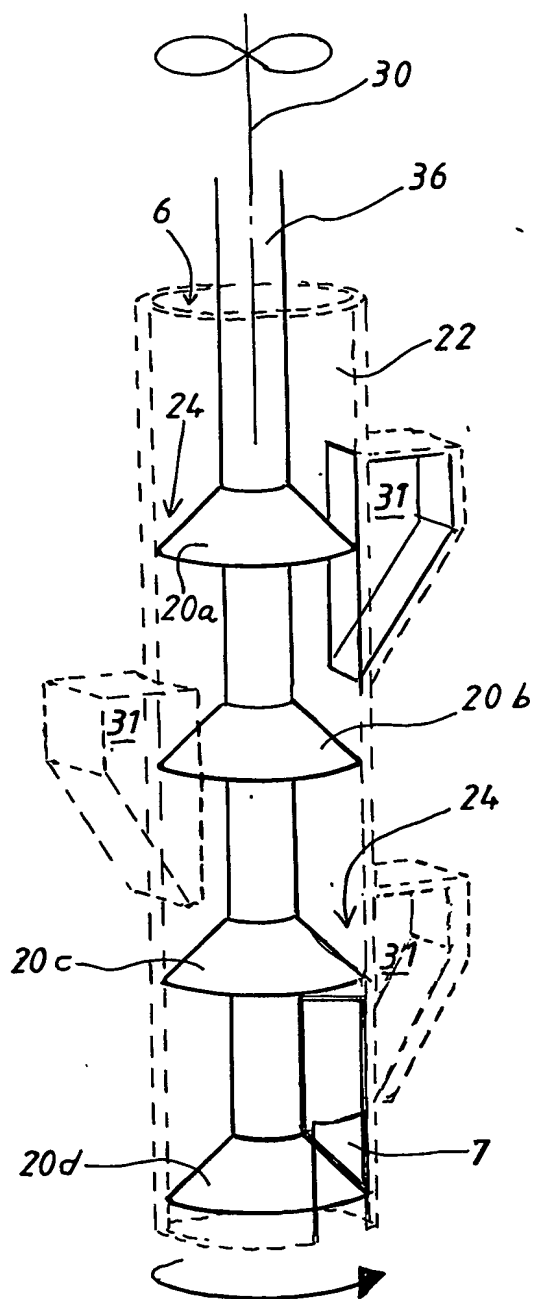


FIG 9a

15/33

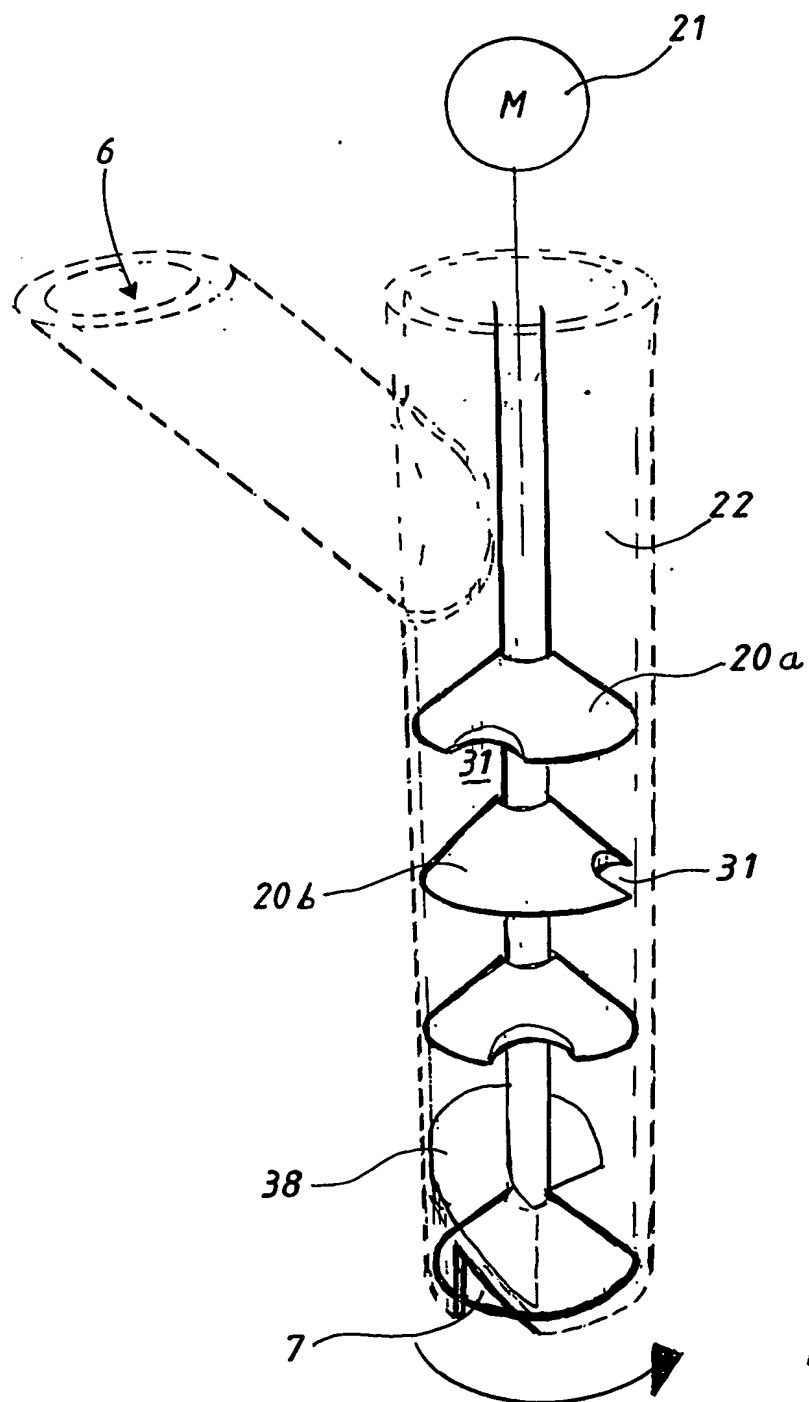


FIG 9b

16/33

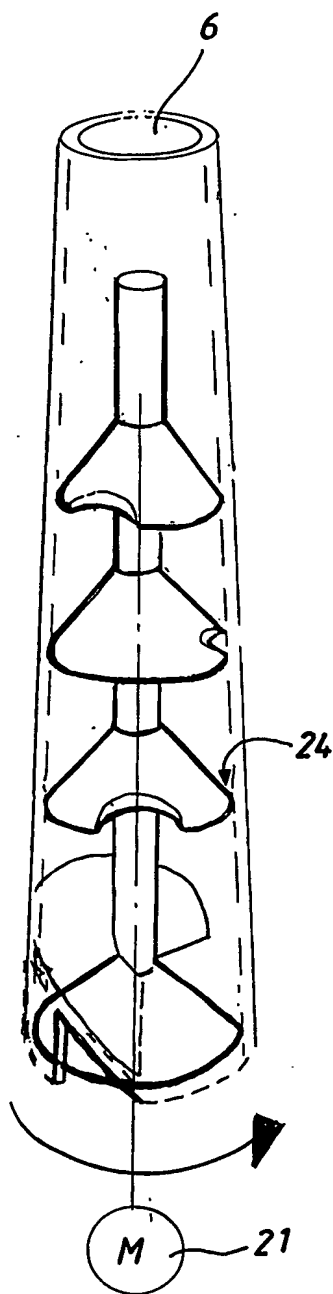


FIG 9c

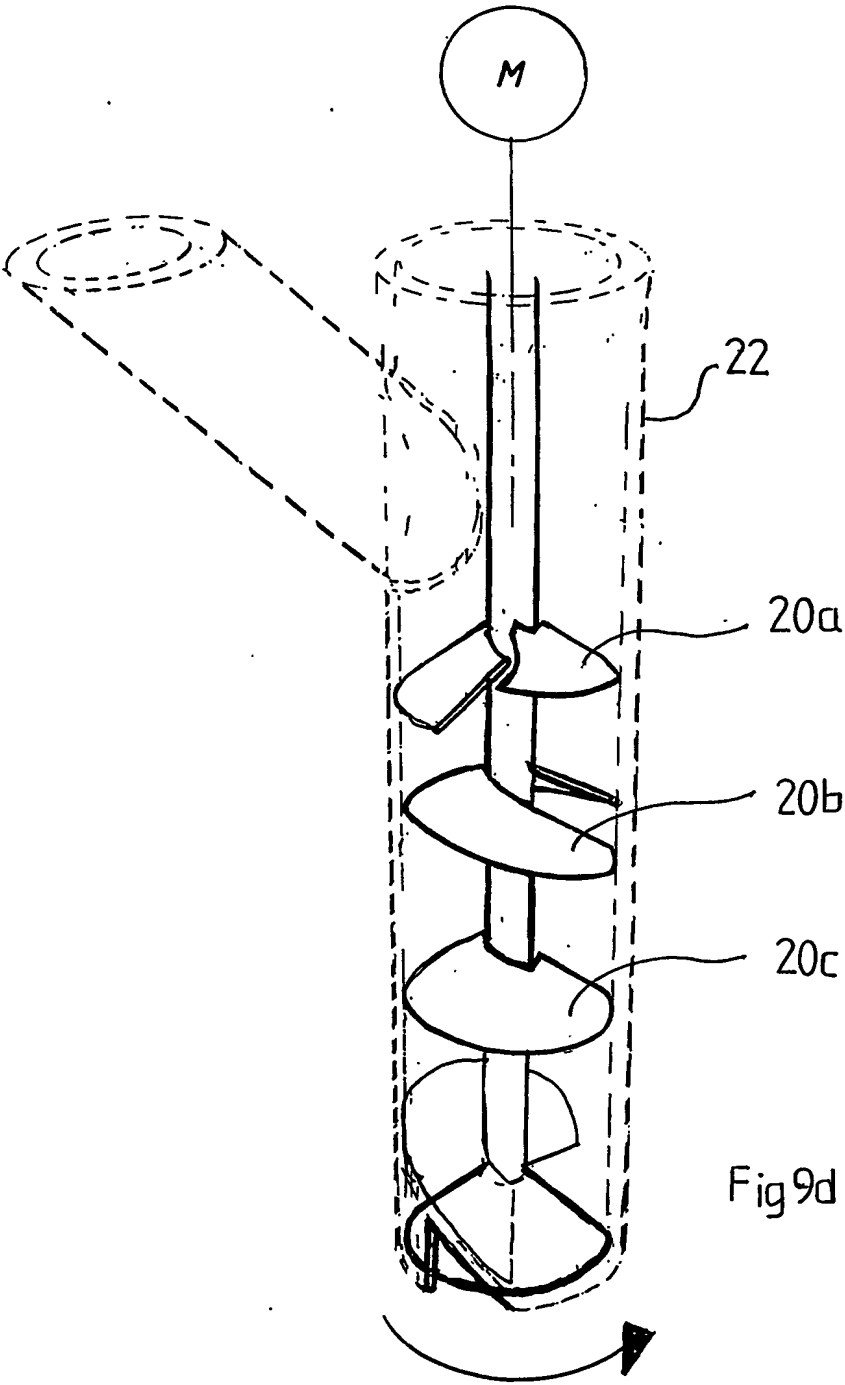
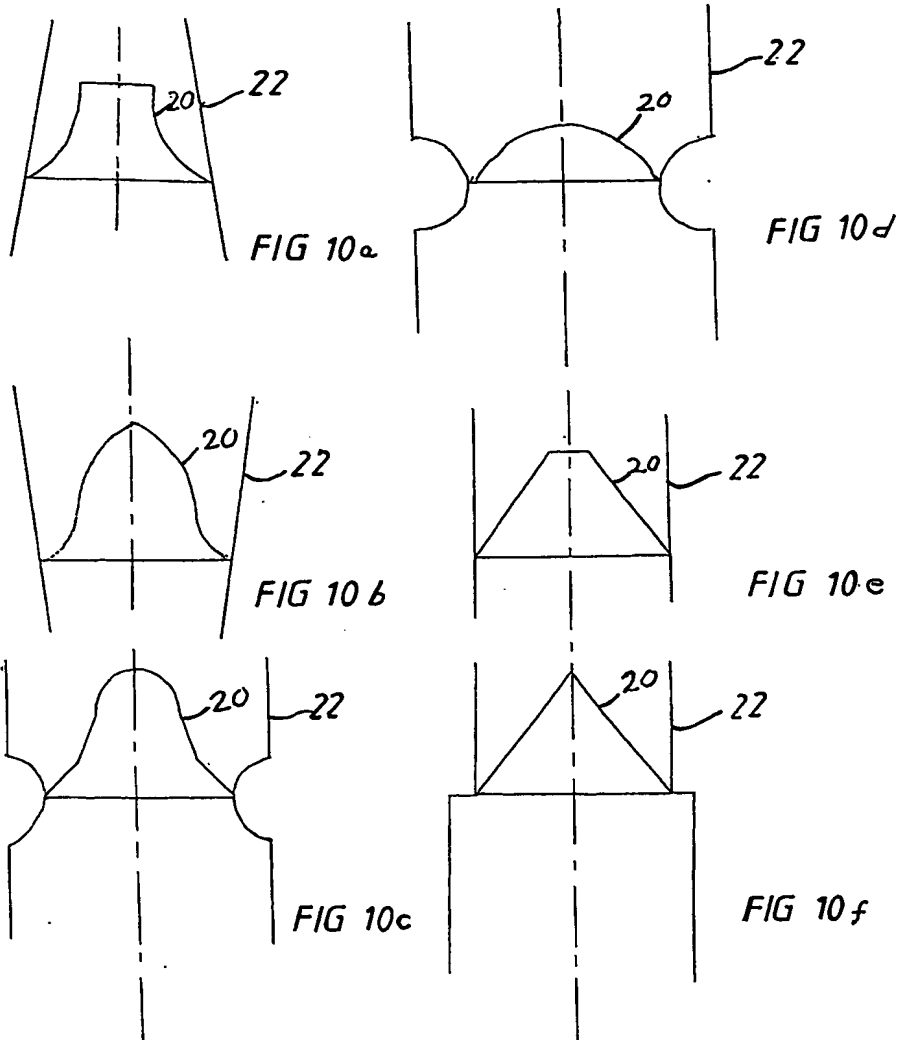


Fig 9d






FIG 11 a




FIG 11 b

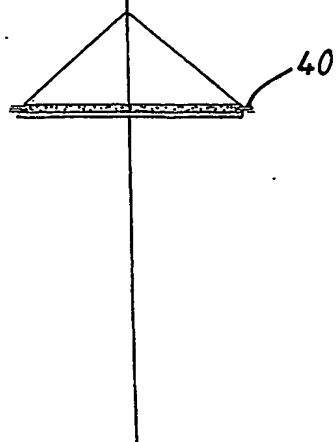


FIG 11 c

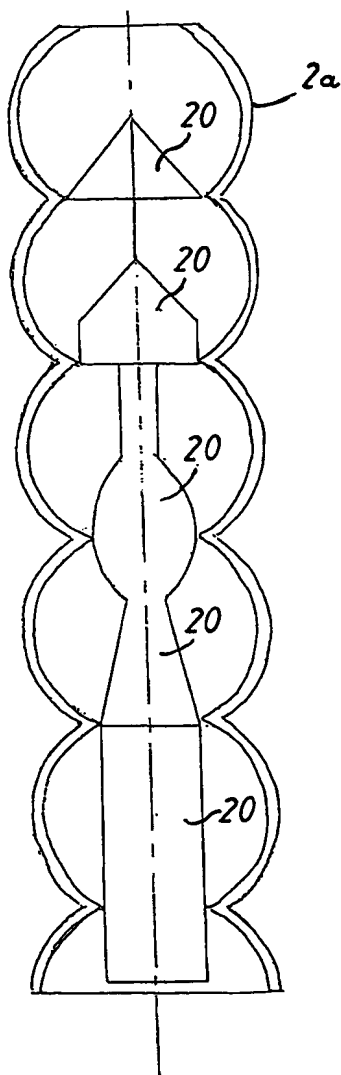
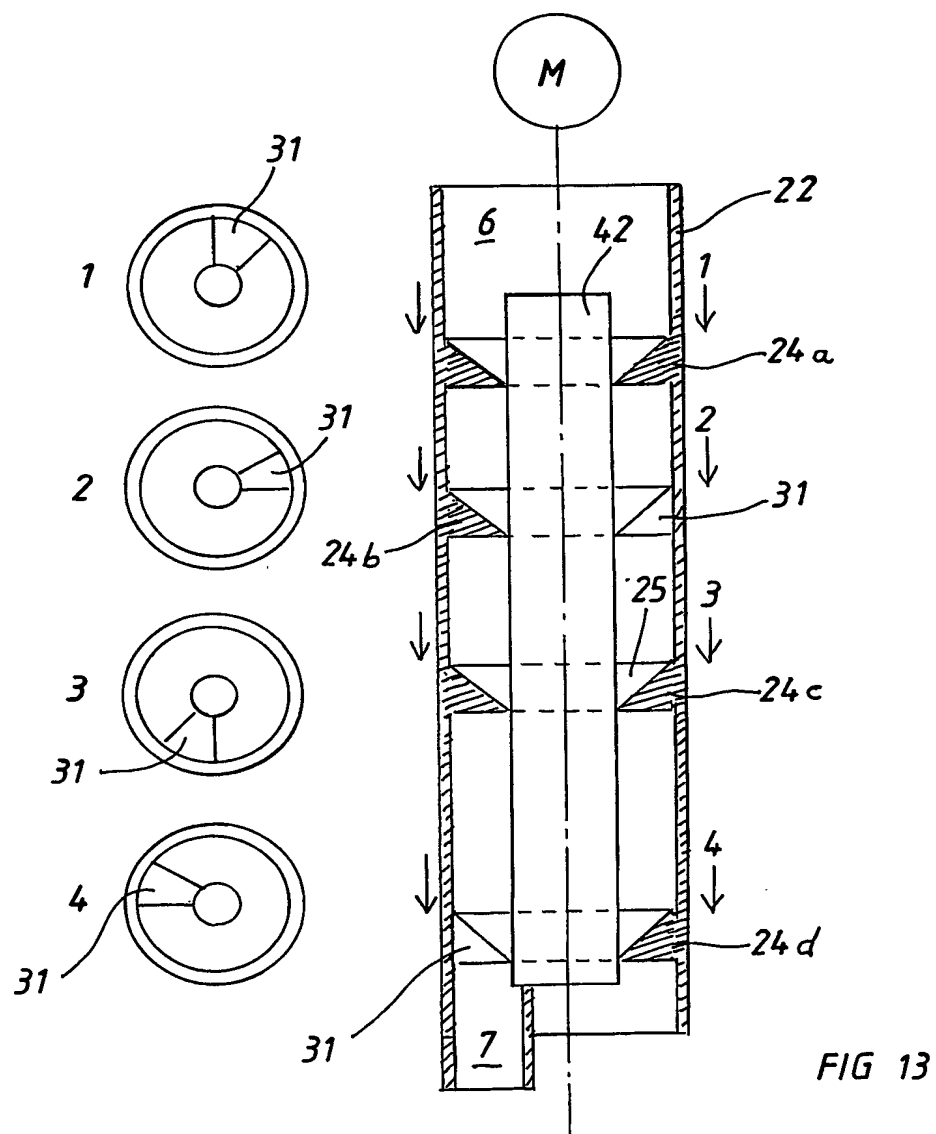


FIG 12





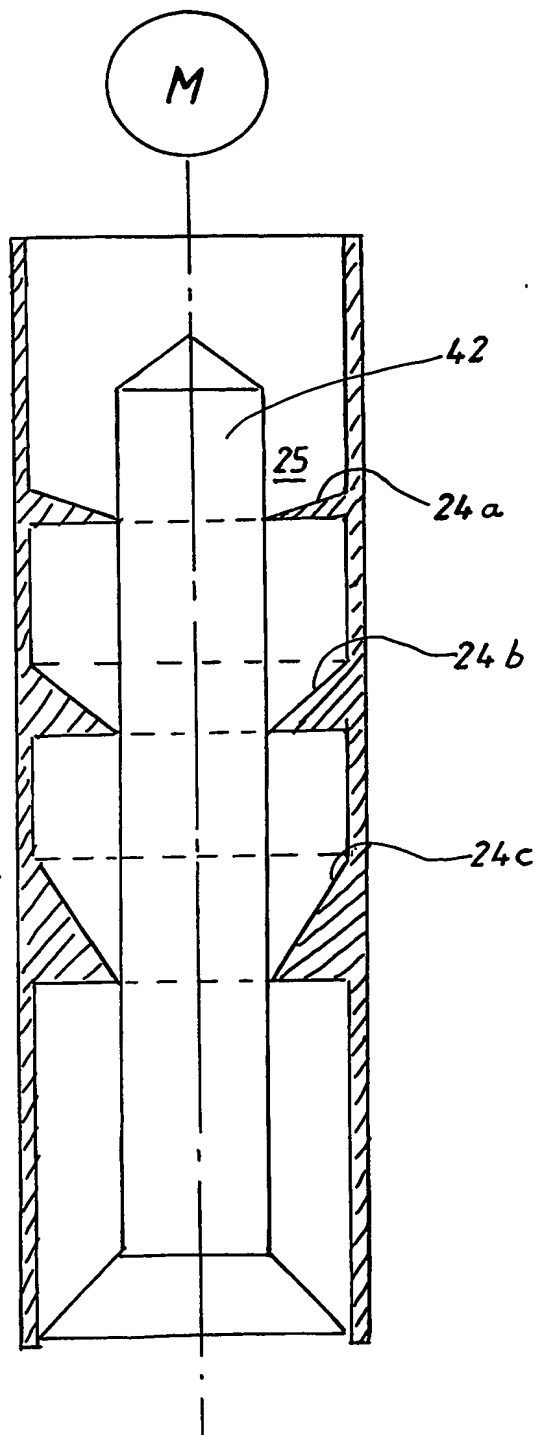


FIG 14

23/33

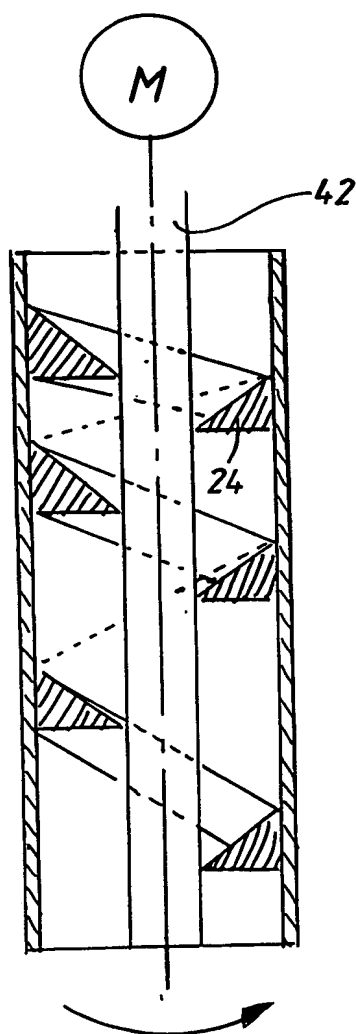


FIG 15a

24/33


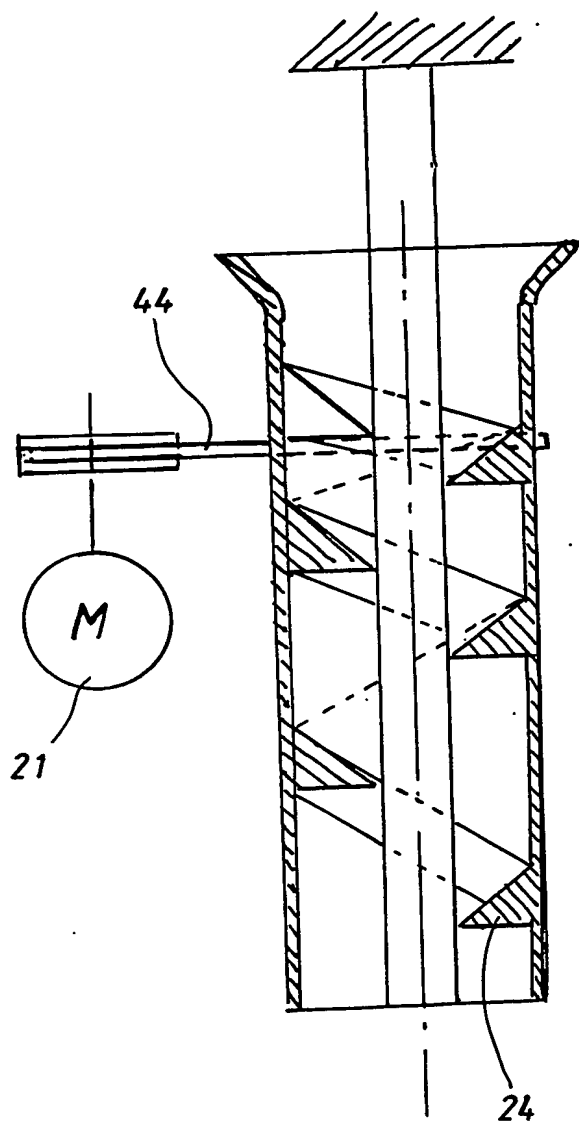


FIG 15 b

25/33

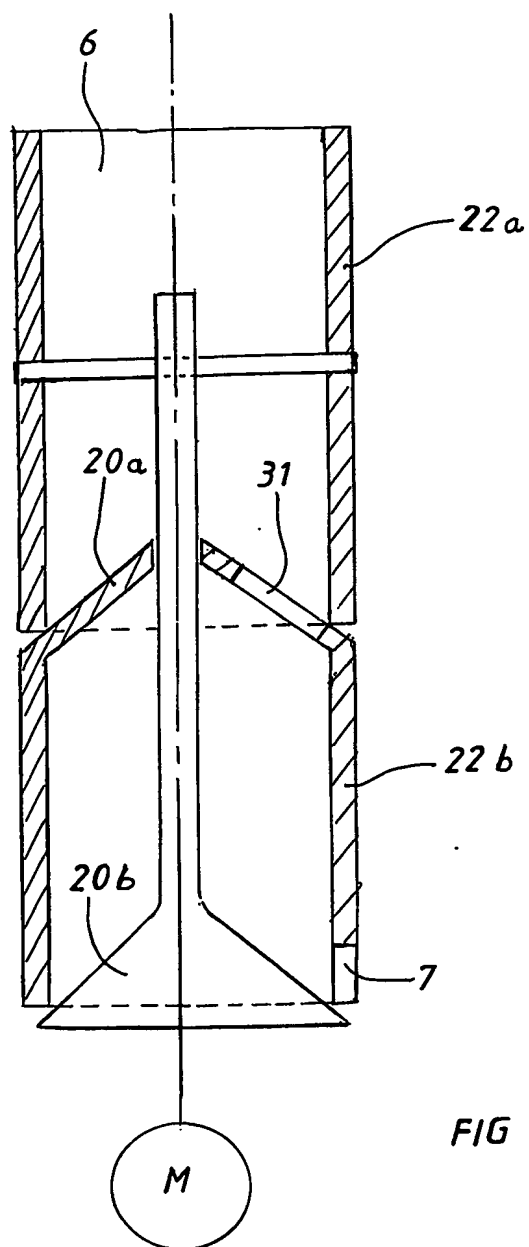

26/33

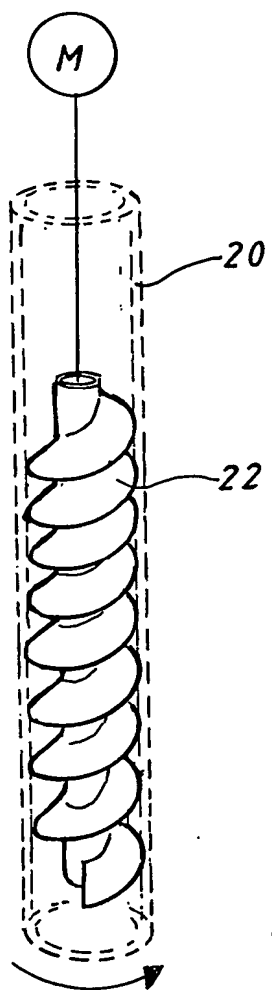


FIG 17a

27/33

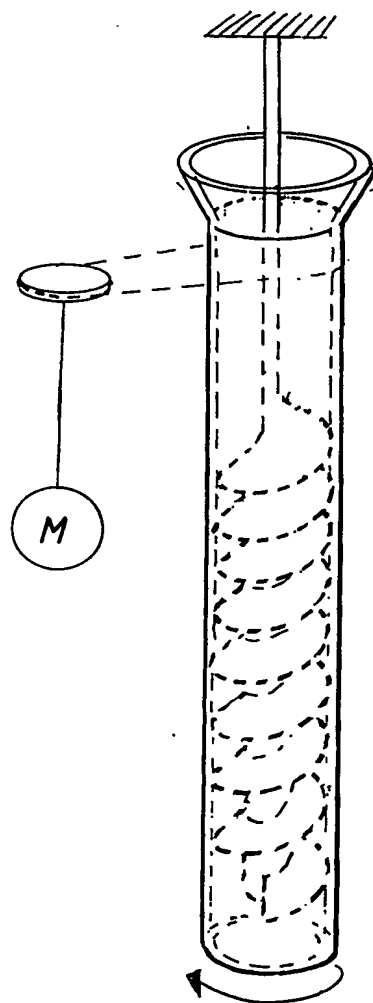


FIG 17 b

28/33


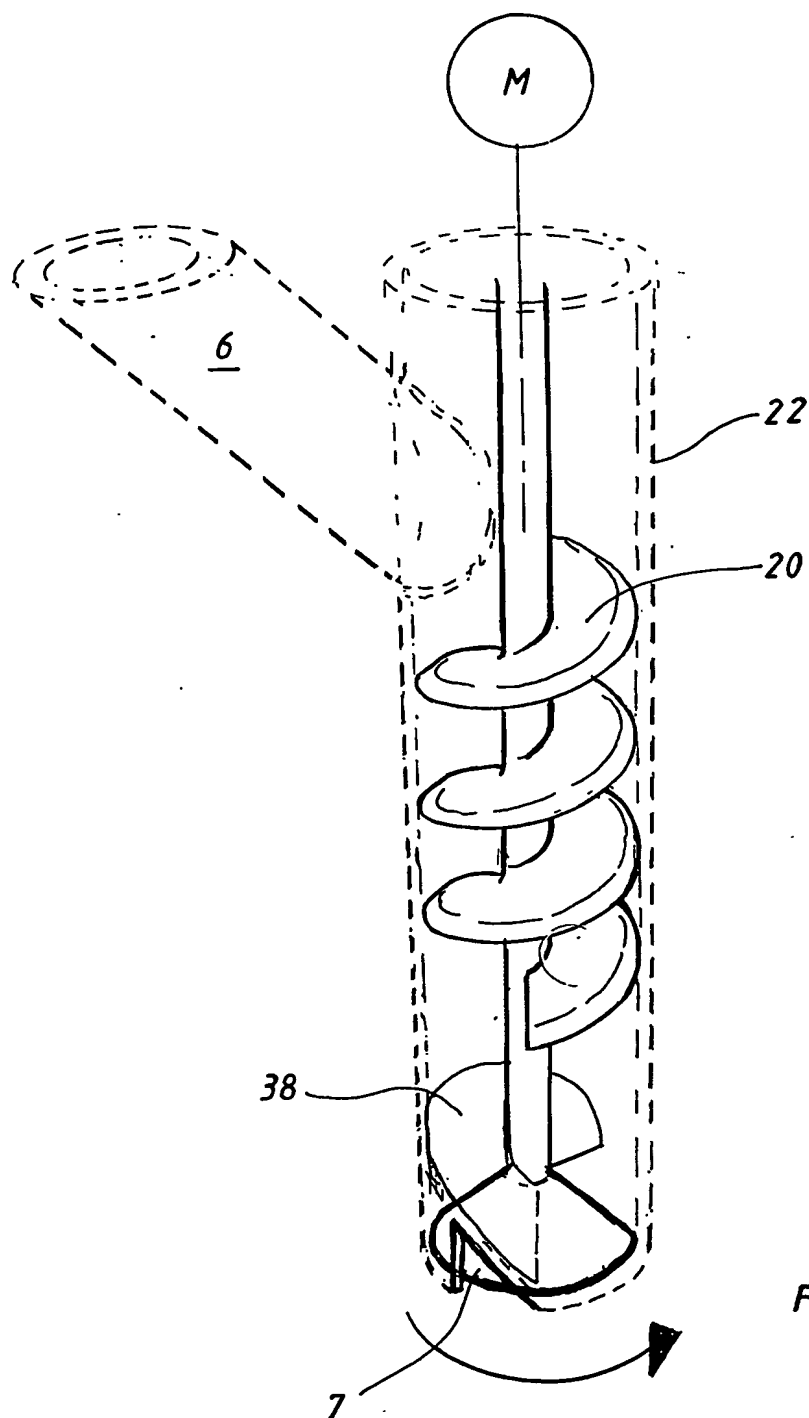


FIG 18



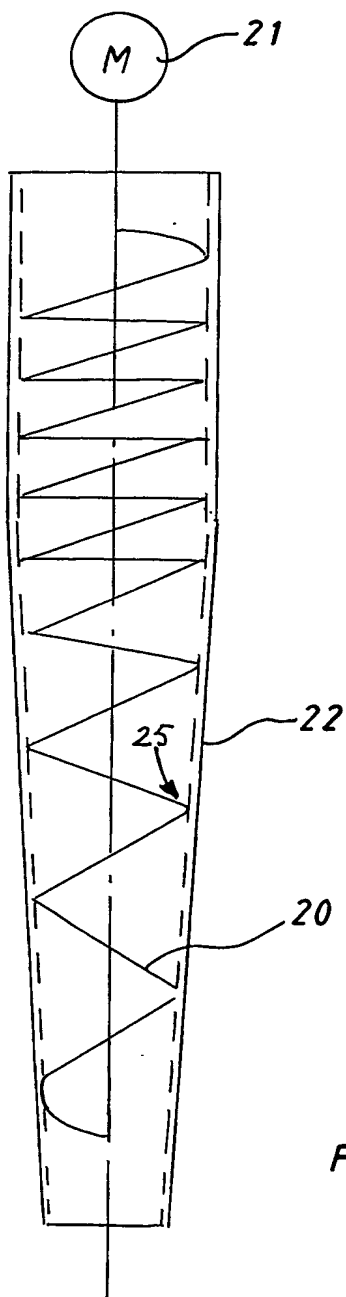

30/33



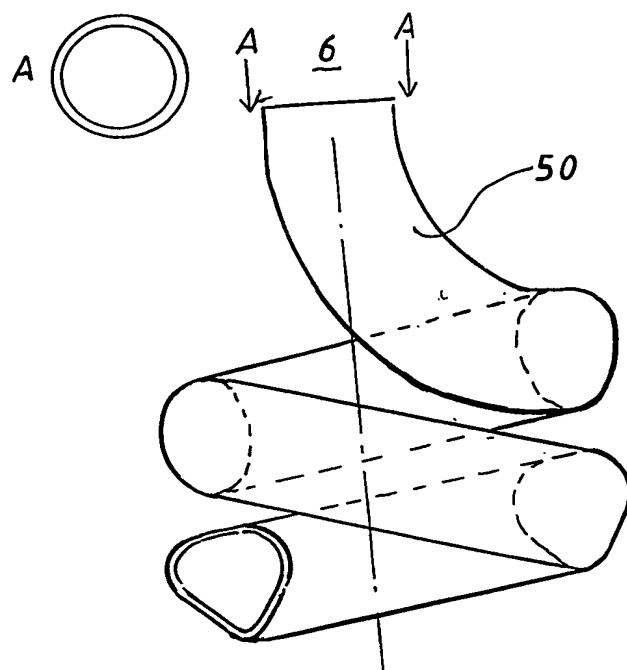


FIG 21

32/33

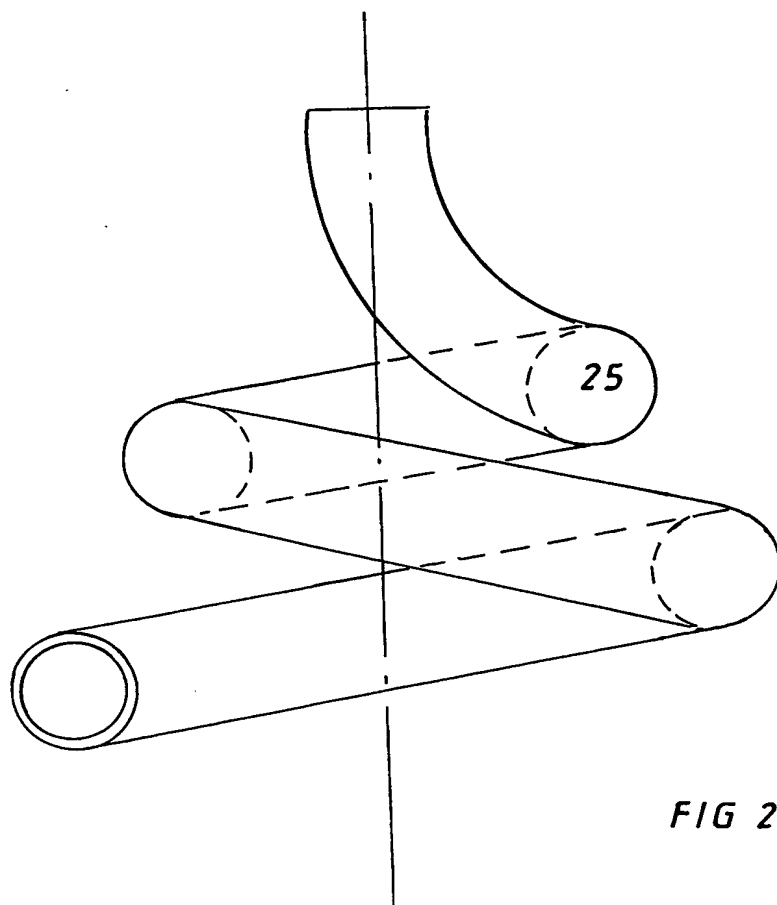


FIG 22

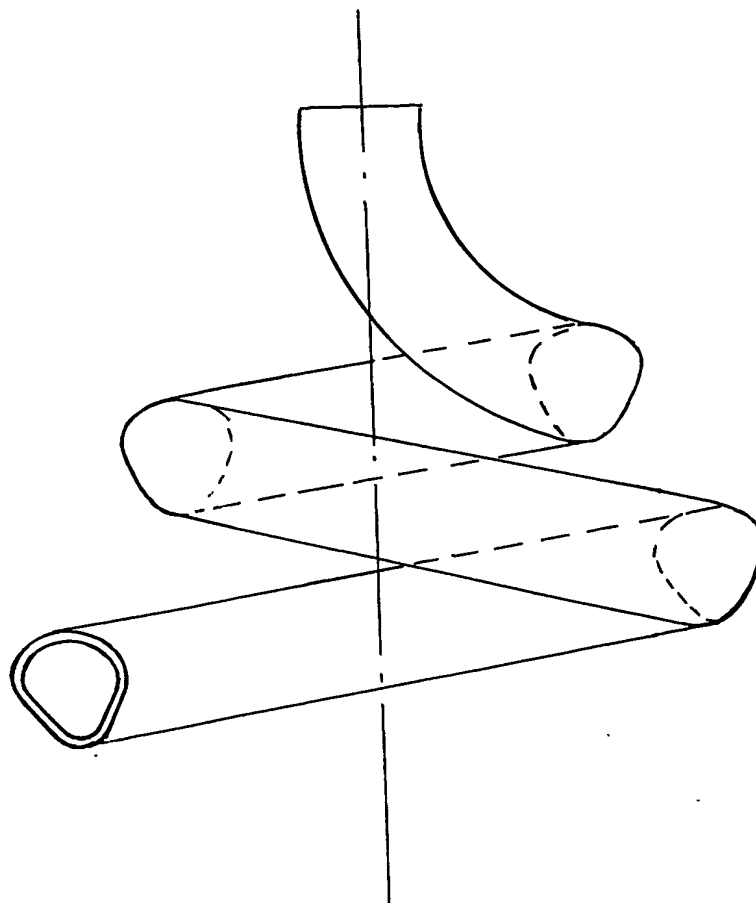


Fig 23

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 03/00925

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: A01C 7/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: A01C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4403713 A (HERRIAU), 13 Sept 1983 (13.09.83), figure 1 --	1-3,31
X	EP 0583571 A1 (AMAZONEN-WERKEN H DREYER GMBH), 23 February 1994 (23.02.94), column 3, line 17 - line 21, figure 3, abstract --	27,31
A	--	1,3,11,14
X	DE 19636787 C1 (UNIVERSITÄT HOHENHEIM), 2 April 1998 (02.04.98), figure 1, abstract --	27,31
A	--	1,11,14

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

- |   |  |
|---|--|
| * Special categories of cited documents:  | "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention  |
| "A" document defining the general state of the art which is not considered to be of particular relevance  | "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone   |
| "E" earlier application or patent but published on or after the international filing date   | "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art |
| "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) | "&" document member of the same patent family  |
| "O" document referring to an oral disclosure, use, exhibition or other means  |  |
| "P" document published prior to the international filing date but later than the priority date claimed  |  |

Date of the actual completion of the international search

26 Sept 2003

Date of mailing of the international search report

30-09-2003

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Magnus Thorén/EK

Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 03/00925

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3195485 A (M W REYNOLDS), 20 July 1965 (20.07.65), figure 3	27
A	figure 6 --	1,5,11,14
A	EP 0350634 A2 (AMAZONEN-WERKE H DREYER GMBH & CO KG), 17 January 1990 (17.01.90), column 14, line 34 - line 56 --	1,7,31
A	US 4002266 A (BEEBE), 11 January 1977 (11.01.77), column 2, line 34 - line 35, figure 3, abstract --	1,10,31
A	US 3548765 A (XAVIER ROGER GRATALOUP), 22 December 1970 (22.12.70), column 2, line 1 - line 14 --	1,31
A	US 4145981 A (JIMENEZ), 27 March 1979 (27.03.79), column 4, line 60 - line 65, figure 2 --	7,11,17
P	EP 1234489 A2 (VÄDERSTAD-VERKEN AB), 28 August 2002 (28.08.02), column 4, line 3 - line 24; column 5, line 17 - line 22; column 5, line 55 - line 58 -- -----	1-4,6,7,10, 25,31

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

26/07/03

International application No.

PCT/SE 03/00925

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
US	4403713	A	13/09/83	AR	231208 A	31/10/84
				AT	10894 T	15/01/85
				AT	13795 T	15/07/85
				AU	541820 B	24/01/85
				AU	6892381 A	21/01/82
				BR	8101900 A	06/10/81
				DE	3167902 D	00/00/00
				DE	3170996 D	00/00/00
				EP	0037337 A,B	07/10/81
				EP	0037338 A,B	07/10/81
				FR	2478941 A,B	02/10/81
				US	4392439 A	12/07/83
				ZA	8102166 A	28/04/82
				FR	2488480 A,B	19/02/82
				FR	2499816 A,B	20/08/82
-----						
EP	0583571	A1	23/02/94	CZ	9301325 A	16/02/94
				DE	4223504 A	20/01/94
				SK	75993 A	09/03/94
-----						
DE	19636787	C1	02/04/98	EP	0829193 A	18/03/98
-----						
US	3195485	A	20/07/65	NONE		
-----						
EP	0350634	A2	17/01/90	AT	98838 T	15/01/94
				DE	3824061 A	18/01/90
				DE	3825572 A	29/03/90
				DE	3831619 A	29/03/90
				DE	58906477 D	00/00/00
				DE	3903225 A	09/08/90
-----						
US	4002266	A	11/01/77	AU	476631 B	30/09/76
				AU	5759473 A	09/01/75
				CA	1007113 A	22/03/77
				FR	2196571 A	15/03/74
				GB	1438569 A	09/06/76
				ZA	7304566 A	26/02/75
-----						
US	3548765	A	22/12/70	BE	723536 A	16/04/69
				DE	1811181 A	04/05/72
				FR	1558490 A	28/02/69
				GB	1184509 A	18/03/70
-----						
US	4145981	A	27/03/79	NONE		
-----						
EP	1234489	A2	28/08/02	AU	4296501 A	08/10/01
				CA	2405479 A	04/10/01
				EP	1267857 A	02/01/03
				SE	0100600 A	23/08/02
-----						

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**